



20W / 40W / 60W



80W / 100W / 120W



LED Full Cut-off Wall Pack Family Series

CONSTRUCTION:

Die-cast aluminum housing. PC diffuser.

OPTICAL SYSTEM:

Lumileds 2835 LED chips. 120° beam angle options.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input.

-40°C to 50°C, -40°F to 122°F

INSTALLATION & MOUNTING:

Wall mounting.

CONTROLS & DIMMING:

0-10V dimming comes standard.

FEATURES

- Default Wattage:
 - 60W
 - 120W
- Default CCT:
 - 5,000K
- Surge Protection: L-N: 6kV, L&N-E: 6kV
- IP65 rated
- No UV or IR in the beam
- No flickering or humming
- Easy installation and maintenance
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Factories
- Supermarkets
- Logistic Centers
- Exhibition Halls
- Hotels

DLC Product ID:

- LOC-FCWP-MW(20/40/60)MCCT(30/40/50) – S-3G8MMY
- LOC-FCWP-MW(80/100/120)MCCT(30/40/50) – S-PHH320



OPTIONAL ACCESSORIES:



Microwave Sensor
LOC-ACY-S-MWS-01-G1
(Compatible with LOC-RC-WHITE-G1)



Microwave Bluetooth Sensor
LOC-ACY-S-MWS-BT-01-G1
(Compatible with App)



PIR Sensor
LOC-ACY-S-PIRS-01-G1
(Compatible with LOC-RC-WHITE-G1)



PIR Bluetooth Sensor
LOC-ACY-S-PIRS-BT-01-G1
(Compatible with App)



Photocell (Daylight Sensor)
LOC-SK-101-4T
(Not compatible with remote control)



Motion Sensor
LOC-ANT-5-4T
(Compatible with LOD-RC-100)



Remote Control
LOD-RC-100



Remote Control
LOC-RC-WHITE-G1



Emergency Driver
LOC-EMDR-8W-AC
(LOC-FCWP-MW(20/40/60)MCCT(30/40/50) model only)



Emergency Driver
LOC-EMDR-18W-AC-C



Emergency Driver
LOC-EMDR-18W-AC-L



Emergency Driver
LOC-EMDR-16WLI-170SD

WATTAGE	BUG RATING
20W/40W/60W	B3-U0-G1
80W/100W/120W	B3-U0-G2



LOC-FCWP-MW(20/40/60)MCCT(30/40/50)

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
20W	3000K / 4000K / 5000K	2,834.2LM	141.71lm/W	120-277V	82	0.9	15%	400W HID
40W	3000K / 4000K / 5000K	5,668.4LM	141.71lm/W	120-277V	82	0.9	15%	400W HID
60W	3000K / 4000K / 5000K	8,502.6LM	141.71lm/W	120-277V	82	0.9	15%	400W HID

LOC-FCWP-MW(80/100/120)MCCT(30/40/50)

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
80W	3000K / 4000K / 5000K	11,340.8LM	141.76lm/W	120-277V	82	0.9	15%	400W – 600W HID
100W	3000K / 4000K / 5000K	14,176LM	141.76lm/W	120-277V	82	0.9	15%	400W – 600W HID
120W	3000K / 4000K / 5000K	17,011.2LM	141.76lm/W	120-277V	82	0.9	15%	400W – 600W HID

MEASUREMENTS

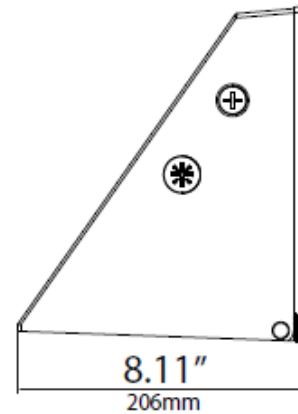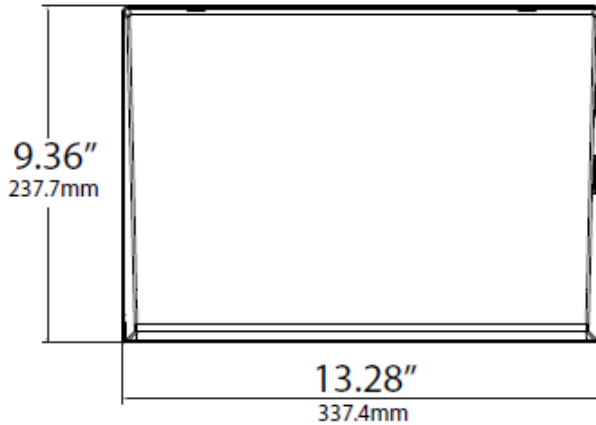

MODEL	QTY	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	PCS CTN	UPC CODE
LOC-FCWP-MW(20/40/60)MCCT(30/40/50)	1	9.04lbs	15.35" x 14.06" x 9.45"	10.41lbs	1	00810050947299
LOC-FCWP-MW(80/100/120)MCCT(30/40/50)	1	9.26lbs	15.35" x 14.06" x 9.45"	10.63lbs	1	00810050947305